


Tier1

BloombergNEF

199R TOPCon BIFACIAL

575-590W

High efficiency bifacial modules

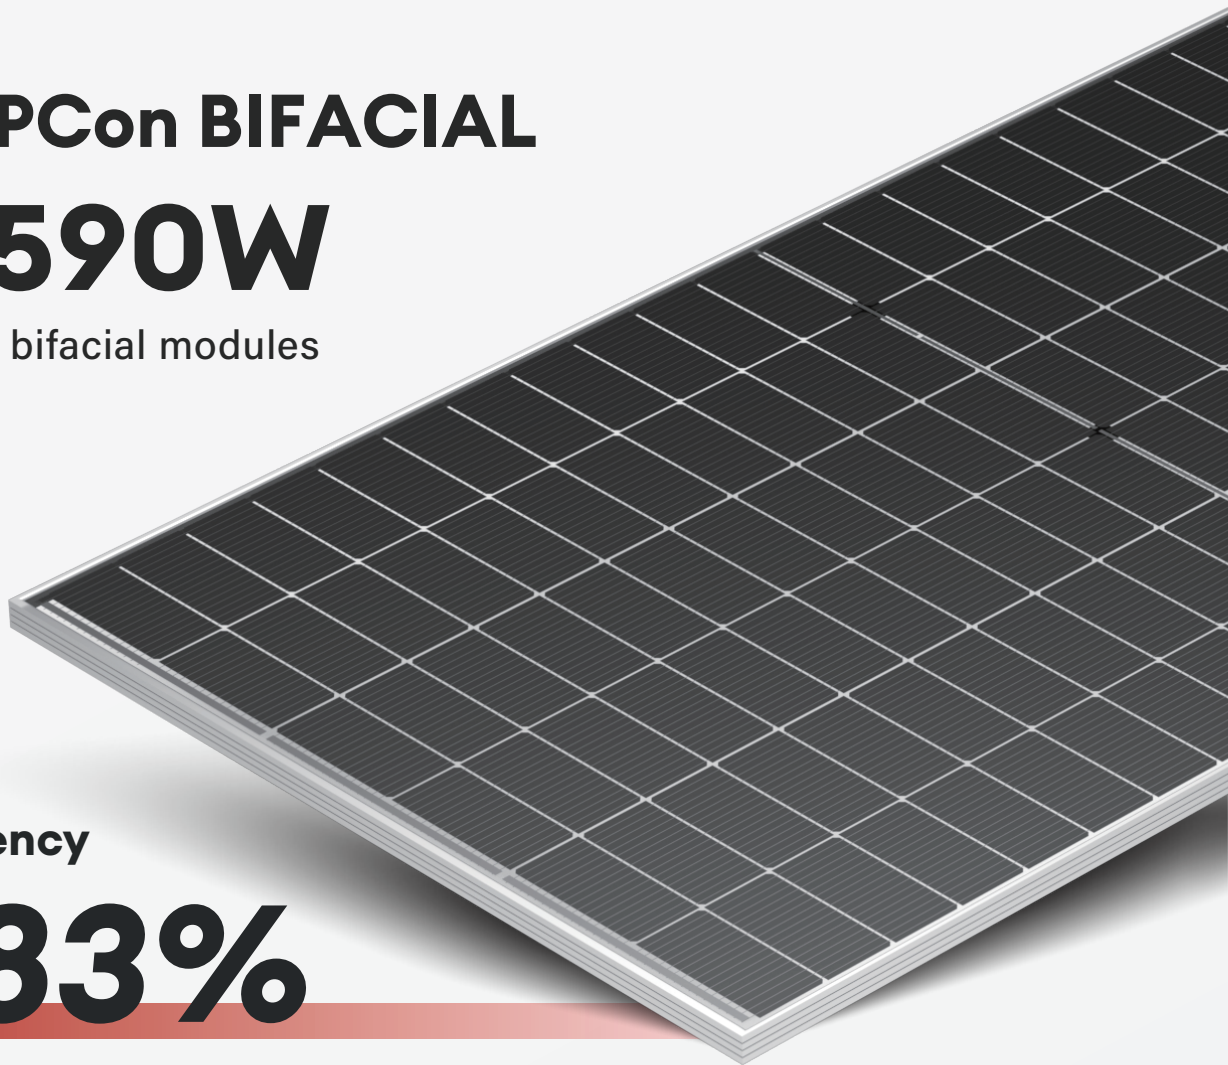

Module efficiency

22.83%



WITHSTAND STRONG




PID RESISTANCE



AUTOMATIC PRODUCTION



HIGH EFFICIENCY

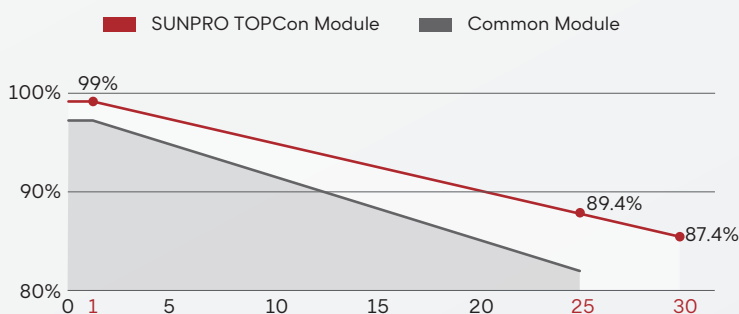

WARRANTY

Quality Guarantee **25 years**

Power Warranty **30 years**

CERTIFICATE



ELECTRIC CHARACTERISTICS

SPDG (575/590W)-N132RX10

Model of modules	SPDG575-N132RX10		SPDG580-N132RX10		SPDG585-N132RX10		SPDG590-N132RX10	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Power (Pmax/W)	575	433.70	580	437.90	585	442.00	590	446.00
Maximum power current (Vmp)	40.12	37.60	40.33	37.80	40.54	38.00	40.75	38.20
Maximum power current (Imp)	14.33	11.54	14.38	11.58	14.43	11.62	14.48	11.67
Open circuit voltage (Voc)	47.97	45.30	48.19	45.60	48.40	45.80	48.61	46.00
Short circuitcurrent (Isc)	15.16	12.21	15.21	12.25	15.26	12.29	15.31	12.33
Module efficiency	22.25%		22.44%		22.64%		22.83%	

STC (Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m², Cells Temperature25°C)

NMOT (Irradiance 800W/m², Ambient Temperature 20°C,AM1.5,Wind Speed 1m/s)

ELECTRICAL CHARACTERISTICS WITH 15% REAR SIDE POWER GAIN

Front power Pmax/W	661.25	667.00	672.75	678.50
Maximum power voltage (Vmp)	40.12	40.33	40.54	40.75
Maximum power current (Imp)	16.48	16.54	16.59	16.65
Open circuit voltage (Voc)	47.97	48.19	48.40	48.61
Short circuitcurrent (Isc)	17.43	17.49	17.55	17.61

STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	2278x1134x30mm
Weight	31kg
Cell	132 cells,N type Mono-Crystalline , 182.2mm×99.5mm
Front glass	2.0mm , Anti-Reflection Coating
Back glass	2.0mm , Heat Strengthened Glass
Frame	Anodized aluminum alloy
Junction box	IP68 , 3 bypass diodes
Output wire	4mm ²
Wire length	Line length 1300mm/customized
Connector	MC4 Compatible
Packing Specification	36 pcs/Pallet ; 720 pcs/40' HQ


OPERATING PARAMETERS

Power tolerance (W)	(0~+5W)
Maximum system voltage (V)	1500V
Maximum rated fuse current (A)	30A
Current operating temperature (C)	-40~+85°C
Mechanical load	+5400Pa/-2400Pa


TEMPERATURE CHARACTERISTICS

Temp. Coeff. of Isc (TK Isc)	0.046% / °C
Temp. Coeff. of Voc (TK Voc)	-0.25% / °C
Temp. Coeff. of Pmax (TK Pmax)	-0.30% / °C
Normal Operting Cell Temperature	45±2°C

MODULE DIMENSIONS(MM)

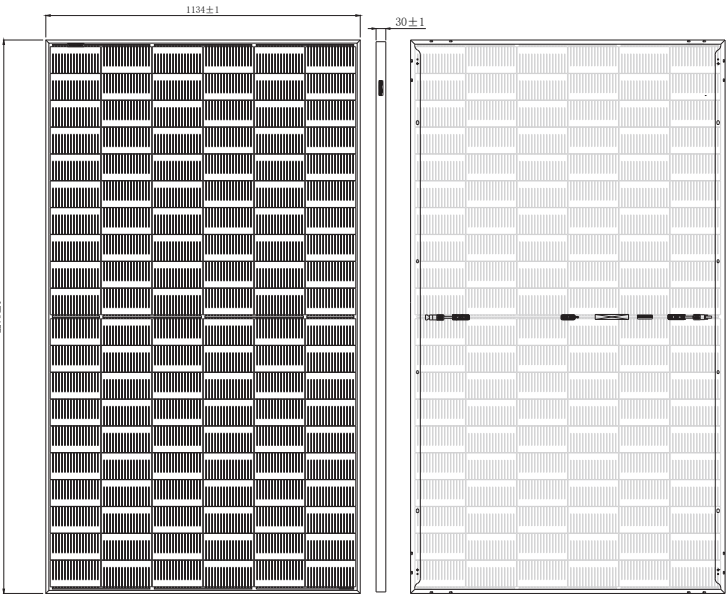

I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

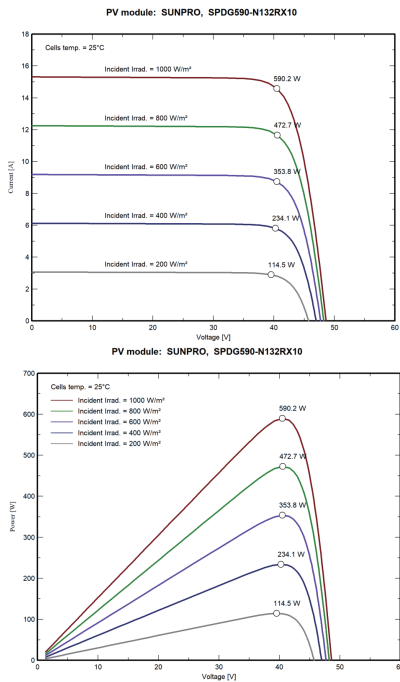

Zhejiang Sunpro Power Technology Co., Ltd

Add.: Qinggang Iustrial Zone, Yuhuan City, Zhejinag Province

Tel: +86 0576-80730906 E-mail: info@sunpropower.com Website: www.sunpropower.com

*The above parameters are for reference only, and the actual parameters of the factory shall prevail